




Zoom Spot 14W

Zoom Spot er en af vores mest populære løsninger. Det fremragende, tekniske lys er kraftigt og fokuseret, og bruges i tusindvis af butikker, restauranter, kontorer og private hjem verden over.

Skinnespottet er mere fleksibelt end de fleste. Du kan justere lyskeglen med to skærme, hvor den indvendige skærm kan trækkes ind eller ud for at ændre på lysets spredning, fra koncentrede 5° til hele 50°.

Lik A/S
Maserativej 5, 7100 Vejle
+45 7649 8484
info@lik.dk

lik.dk

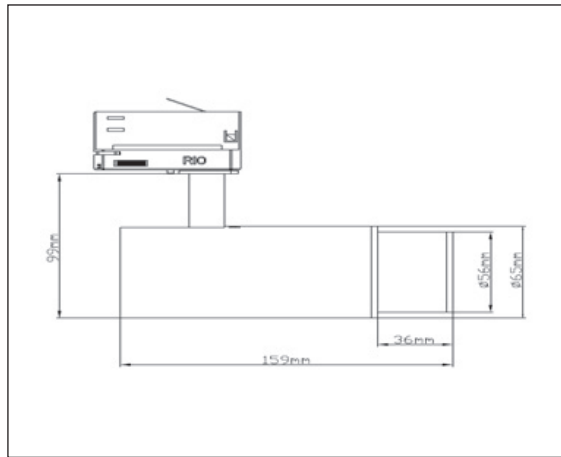

Armature:		CCT	2700K - 3000K - 4000K Vivid 3000K
Material	Aluminium		
Colour (RAL)	Black 9004 - White 9016	LifeSpan hours (L/B)	50.000h - L70B50
Weight	500g	Wattage Chip	13W
Dimensions (L-H-Ø)	159mm - 99mm - 65mm	Wattage Total	15W
Socket	-	Flicker Index	< 1
Rotation Angle	350°	Svm Visual Flicker	< 1
Tilting Angle	90°	Technical data:	
Beam Angle	5° - 50°	Driver	Tridonic
UGR	6	Dimmable	NON - 1-1V - DALI - Triac
Light Source:		Voltage/Current	220-240V - 50/60Hz - 500mA
Chip Type	COB	Track Adapter	Global GA69
LED Flux	1320lm - 1393lm - 1477lm - Vivid 1323lm	No. of fixtures on B/C/D	10A B10/ 13/ 16 = 45/ 55/ 64 C10/ 13/ 16 = 75/ 91/ 106
Fixture Flux	598lm - 631lm- 669lm Vivid 595lm	Installation	Track mounted
		Temperature	-5° - 35°
MacAdam	3	Accessories	-
CRI	90		